Alrighty Then

Moonn Electronics

Use me to build a clone of the OK by Devi Ever

Hi there!
Thank you for building me!

Yes I am really supposed to sound like that!

If you have any questions or anything else to say, just write an email to
moonnelectronics@gmail.com

Have a nice day!

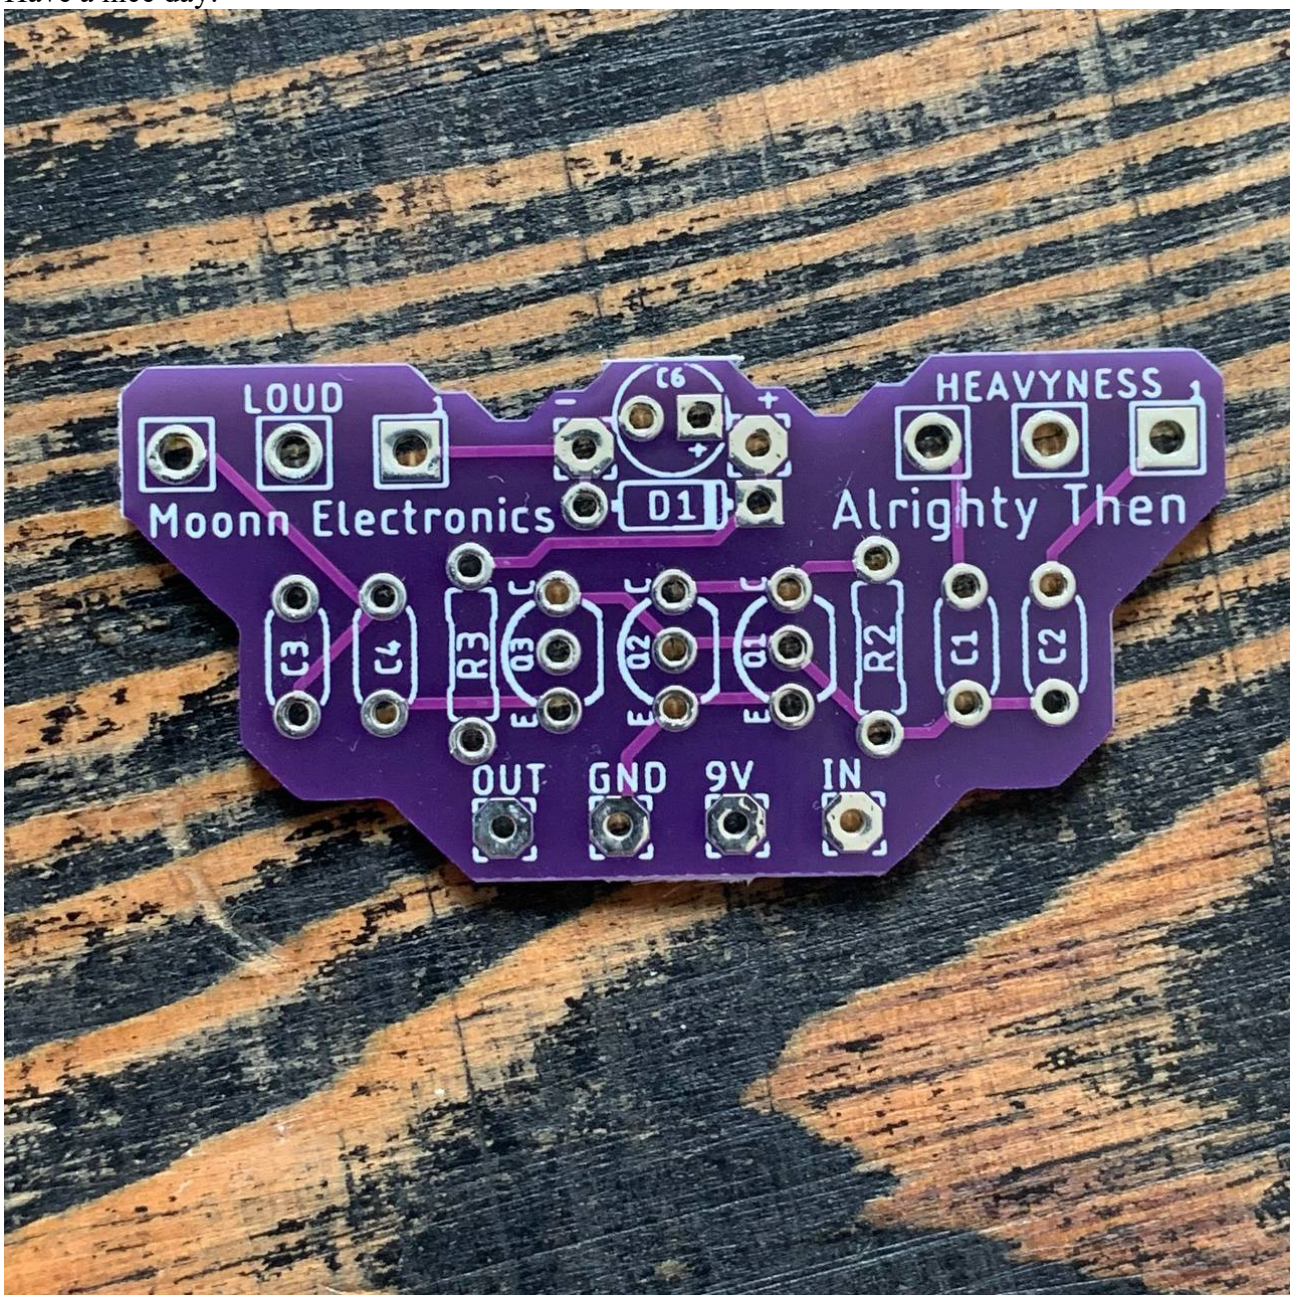

Moonn Electronics is in no way affiliated with Devi Ever

Bill of Materials

Qty	Value	Parts
Resistors		
1	10K	R3
1	3M3	R2
Film Capacitors		
1	10n	C2
3	100n	C1, C3, C4
Electrolytic Capacitors		
1	100u	C6
Smiconductors		
1	1N4001	D1
2	Mpsa18	Q1, Q3
1	2N2907	Q2
Potentiometers		
1	A100K	LOUD
1	B100K	HEAVYNESS

Schematic

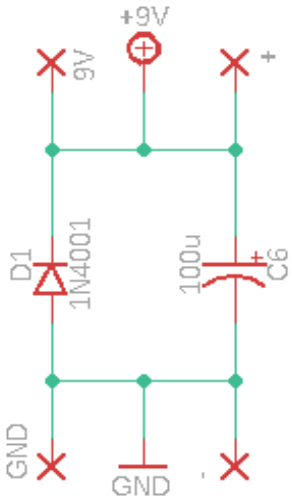
+9V
9V
+
D1
1N4001
100u
C6
GND
GND

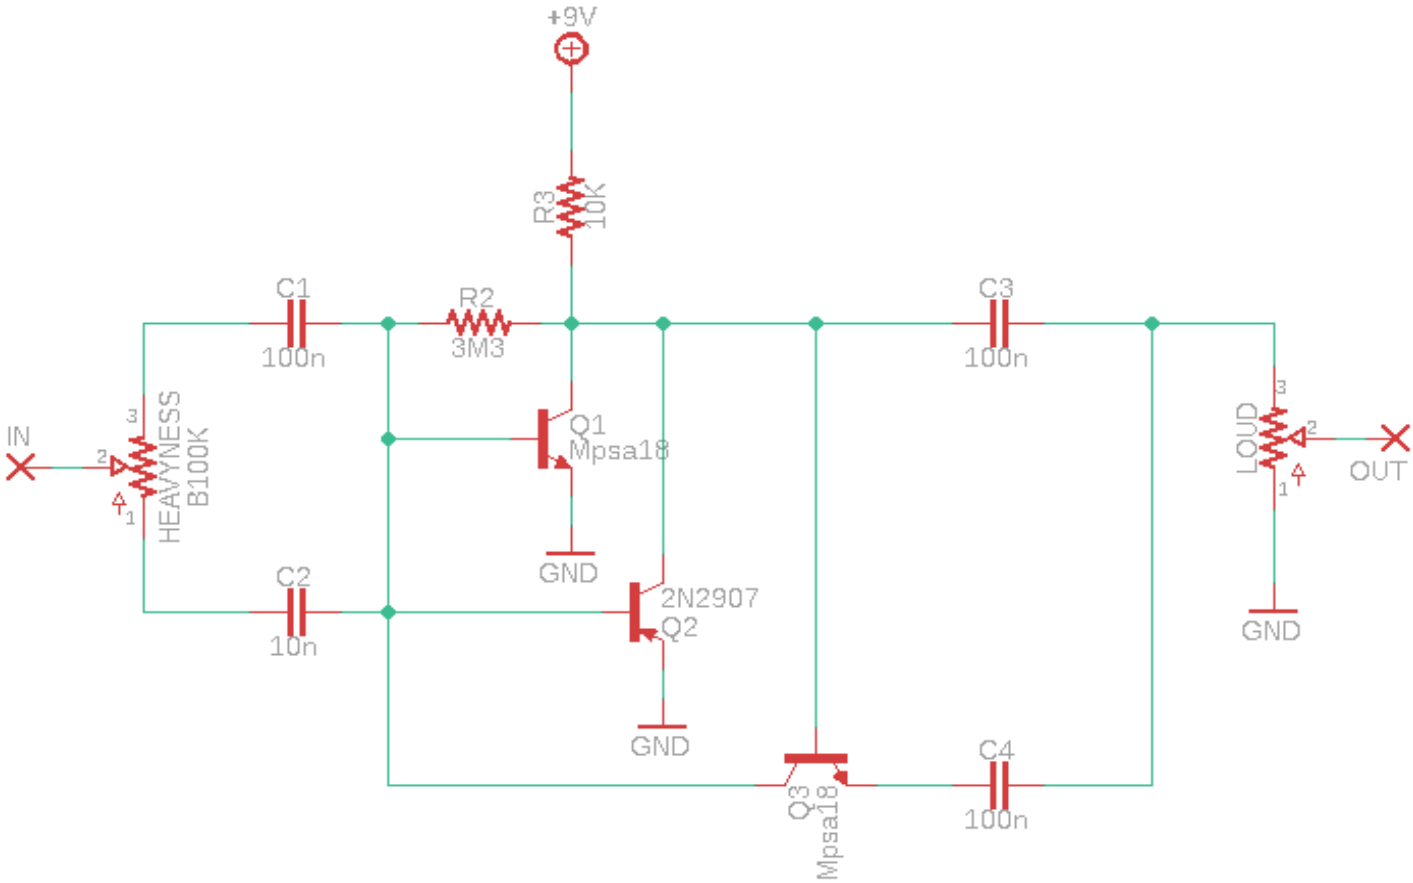
+9V
R3
10K
C1
100n
R2
3M3
C3
100n
IN
HEAVYNESS
B100K
Q1
Mpsa18
LOUD
OUT
GND
C2
10n
2N2907
Q2
GND
Q3
Mpsa18
C4
100n
GND

Offboard Wiring